


# Technical Data

14 x 190mm T&G Engineered Oak  
Old Charm Rivercrack | ENG-OAK-042

## Product Photo:



## Board Construction:

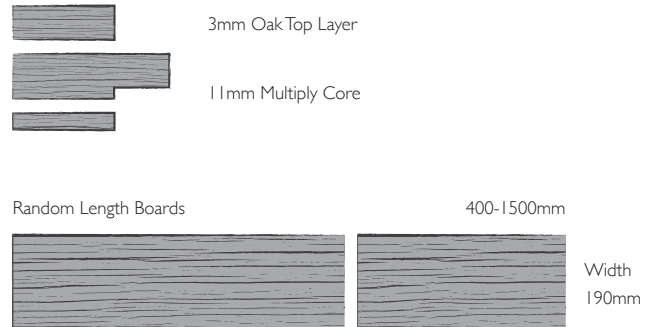

## Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	190mm
Board Length:	Random Lengths (400-1500mm)
Pack Size:	2.508m <sup>2</sup>
Pack Weight:	24.38kg
Packs Per Pallet:	55

## Manufacturer Testing Standard:

Standard:	EN14342:2013 - Multi-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	650 kg/m <sup>3</sup>
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.16 W/mK

## Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Hard Waxed Oiled
Bevel Detail:	4V Bevel
Density of Finish:	0.9kg/l
Fix System:	T&G
Grade:	Classic - Rivercrack
Core Material:	Eucalyptus & Poplar
Janka Reading:	1360

## Misc Items:

Residential Warranty:	On Request
Commercial Warranty:	On Request
Oak Origin:	Europe
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

## Key Features:



## Accreditations:

