

# Technical Data


20 x 191mm T&G Engineered Oak  
Lacquered | ENG-OAK-4432



## Product Photo:



## Board Construction:

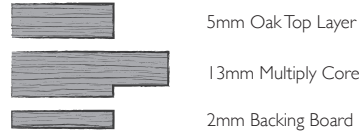

## Product Specification & Handling Information:

Board Depth:	20mm
Board Width:	191mm
Board Length:	1900mm
Pack Size:	1.8145m <sup>2</sup>
Pack Weight:	21.55kg
Packs Per Pallet:	45

## Manufacturer Testing Standard:

Manufacturer Tolerance:	EN13647
Moisture Content:	EN13183-1 (8-10%)
Fire Resistance:	DFL-S1
ISO 9001:	Compliant
Thermal Conductivity:	Awaiting SGS Results
Formaldehyde:	E1
CE Mark:	EN13489
UKTR:	UKTR Compliant

## Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Lacquered
Bevel Detail:	4V Bevel
Density of Finish:	120kg/l
Fix System:	T&G
Grade:	ABCD
Core Material:	Eucalyptus & Poplar
Janka Reading:	1360

## Misc Items:

Residential Warranty:	20 Years (Manufacturers)	
Commercial Warranty:	On Request	
Oak Origin:	Europe	
Manufactured In:	PRC	
Installation Type:	<input checked="" type="checkbox"/>	Float
	<input checked="" type="checkbox"/>	Bond
	<input checked="" type="checkbox"/>	Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C	

## Key Features:



## Accreditations:



Timba Floors & Boards is a trading style of B2B Wood Products Ltd.  
Unit 3A Linden Park, Number One Ind Est, Consett DH8 6SZ

©Copyright 2022

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.