


Technical Data

14 x 155mm 5G Engineered Oak

Board Construction:

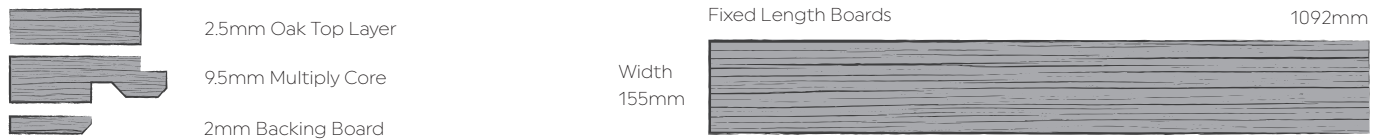

Product Specification & Handling Information:

Board Depth:	14mm	Pack Size:	1.1848m ²
Board Width:	155mm	Pack Weight:	10.3kg
Board Length:	1092mm	Packs Per Pallet:	48

Board Detail:

Type of Board:	Engineered Wood Flooring	Fix System:	Välinge 5G LOC
Finish:	Lacquered Natural Oil	Grade:	Rustic
Bevel Detail:	4V Bevel	Core Material:	Pine
Density of Finish: According to EN13489 Testing Brinell (EN1534)	Average Hardness 37 MPa	Janka Reading:	1360

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board		
Reaction to Fire:	Dfl - s1	Formaldehyde:	E-1
Minimum Density:	500 kg/m ³	Thermal Conductivity:	0.14 W/mK
Minimum Thickness:	14mm	Biological Stability:	NPD

Misc Items:

Residential Warranty:	15 Years	Commercial Warranty:	On Application
Oak Origin:	Europe	Manufactured In:	Poland
Installation Type:	<input checked="" type="checkbox"/> Float <input checked="" type="checkbox"/> Bond <input checked="" type="checkbox"/> Nail	Underfloor Heating	Suitable *

* Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:

