


Technical Data

14 x 150mm T&G Engineered Oak
Brushed & Oiled | ENG-OAK-1411

Product Photo:



Board Construction:

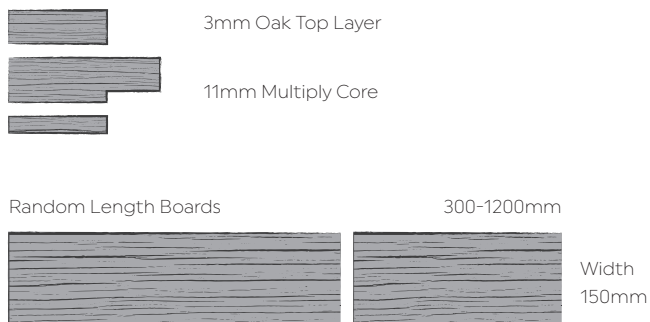

Product Specification & Handling Information:

| | |
|-------------------|-----------------------------|
| Board Depth: | 14mm |
| Board Width: | 150mm |
| Board Length: | Random Lengths (300-1200mm) |
| Pack Size: | 1.80m ² |
| Pack Weight: | 12.5kg |
| Packs Per Pallet: | 48 |

Manufacturer Testing Standard:

| | |
|-----------------------|---|
| Standard: | EN14342:2013 - Multi-layer Flooring Board |
| Reaction to Fire: | Dfl - s1 |
| Minimum Density: | 650 kg/m ³ |
| Minimum Thickness: | 14mm |
| Formaldehyde: | E-1 |
| Thermal Conductivity: | 0.16 W/mK |

Board Detail:

| | |
|--------------------|--------------------------|
| Type of Board: | Engineered Wood Flooring |
| Finish: | Brushed & Oiled |
| Bevel Detail: | 4V Bevel |
| Density of Finish: | NPD |
| Fix System: | T&G |
| Grade: | Rustic |
| Core Material: | Eucalyptus & Poplar |
| Janka Reading: | 1360 |

Misc Items:

| | |
|-----------------------|---|
| Residential Warranty: | On Request |
| Commercial Warranty: | On Request |
| Oak Origin: | Europe |
| Manufactured In: | PRC |
| Installation Type: | <input checked="" type="checkbox"/> Float |
| | <input checked="" type="checkbox"/> Bond |
| | <input checked="" type="checkbox"/> Nail |
| Underfloor Heating: | Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C |

Key Features:



Accreditations:

