


Technical Data | ProTrade Collection

Platinum Oak: Brushed & Matt Lacquered ENG-OAK-1426

Product Photo:



Board Construction:

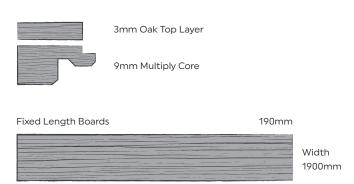

Product Specification & Handling Information:

Board Depth:	12mm	
Board Width:	190mm	
Board Length:	1900mm	
Pack Size:	2.888m²	
Pack Weight:	22kg	
Packs Per Pallet:	45	

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Multiply Flooring Board	
Reaction to Fire:	Dfl - s1	
Minimum Density:	620 kg/m³	
Minimum Thickness:	12mm	
Formaldehyde:	E-1	
Thermal Conductivity:	0.12 W/mK	

Board Detail:

Type of Board:	Engineered Wood Flooring	
Finish:	Brushed & Matt Lacquered	
Bevel Detail:	4V Bevel	
Density of Finish:	150g/m²	
Fix System:	Clic	
Grade:	MAXC01	
Core Material:	Multiply	
Janka Reading:	NPD	

Misc Items:

Residential Warranty:	15 Years		
Commercial Warranty:	5 Years		
Oak Origin:	Europe		
Manufactured In:	PRC		
Installation Type:	\square	Float	
	V	Bond	
	V	Nail	
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay Manifold temp must not exceed 26°C		

Key Features:















Accreditations:





Maxiply Floor is a brand of B2B Wood Products Ltd.