


Technical Data

12x190mm T&G Engineered Oak Brushed & Oiled

Board Construction:

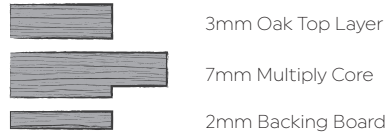

Product Photo:



Product Specification & Handling Information:

Board Depth:	12mm
Board Width:	190mm
Board Length:	1900mm
Pack Size:	2.888m ²
Pack Weight:	30kg
Packs Per Pallet:	45
Product Code:	ENG-OAK-1431

Manufacturing Testing Standard:

Manufacturer Tolerance:	EN13647
Moisture Content:	EN13183-1 (8-10%)
Fire Resistance:	DFL-S1
ISO 9001:	Compliant
Thermal Conductivity:	0.14W/Mk
Formaldehyde:	E1
UKCA / CE:	EN13489
UKTR:	UKTR Compliant

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	UV Oil
Bevel Detail:	4V Bevel
Density of Finish:	650kg/m ³
Fix System:	T&G
Grade:	BCD
Core Material:	Multiply
Janka Reading:	1360

Misc Items:

Residential Warranty:	15 Years
Commercial Warranty:	On Request
Oak Origin:	Europe
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Timba Floors & Boards is a trading style of B2B Wood Products Ltd.

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.

©Copyright 2023